





PERFORMACNE YOU CAN TRUST.

- 1 LAMINATE ADHESIVE.** Five strips of our tough, construction-grade adhesive are used to laminate the shim to the tooth.
- 2 BUILT-IN ALGAE RESISTANCE.** Special colorfast granules embedded in the shingles' surface helps inhibit the growth of blue-green algae that can cause unattractive black stains, streaks and discoloration.
- 3 CORE STRENGTH.** Our resilient fiberglass mat is coated top and bottom with weathering asphalt, then surfaced with colored granules. It's heavy-duty for exceptional durability and structural integrity.
- 4 EXCEPTIONAL BONDING.** IKO'S Fastlock sealant on the shingles' bottom edge gets extra-tacky when activated by the sun's heat. This creates a strong bond to help ensure maximum protection against wind uplift, blow-off and water penetration.



THE IKO ADVANTAGE



Limited Warranty ¹	Limited Lifetime
Iron Clad Protection ¹	10 Years
Limited Wind Warranty ¹	110 mph (177km/h)
Limited High-Wind Warranty Upgrade ^{1 2}	130 mph (210 km/h)
Blue-Green Algae Resistant ¹	Yes

Production Specifications³

Length	40 7/8 in (1038mm)
Width	13 3/4 in (349 mm)
Exposure	5 7/8 in (149 mm)
Coverage Per Bundles	33 1/3 ft ² (3.1m ²)
(3 bundles = 1 full square = 100 sq ft coverage)	

STANDARDS⁴

ASTMD3462, ASTMD3018 , ASTMD3161—Class F,

ASTMD7158—Class H, ASTM E1085/UL790—Class A

¹See Limited Warranty at IKO.com for complete terms, conditions, restriction and application requirements. Shingles must be applied in accordance with application instructions and local building code requirements. ²High-wind application is required. ³ All values show are approximate. ⁴Products are developed with reference to these standards.



Cambridge Collection



DUAL BLACK




BEACHWOOD



DRIFTWOOD



CHARCOAL GREY

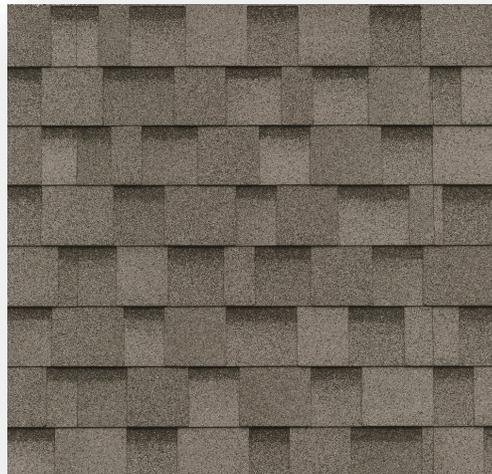

DUAL GREY



EARTHTONE CEDAR

Cambridge Collection



HAVARD SLATE



DUAL BROWN



WEATHERED WOOD



DOVE WHITE